

Specialized Equipment

RIT-TOOL E-FORCE2 - 1082900

NEW!




- Flexible specialized device for rapid intervention teams and for fast door opening
- Fully-featured battery combi tool with replaceable tips depending on the application e.g. breaking doors and windows, cutting round steel and chains, lifting of loads, pulling obstacles, opening of vehicles (extrication)
- High strength and lightweight blades for optimum cutting performances
- Extremely high cutting and spreading forces (cutting performance 1H-2H-3H-4H-5H)
- Pulling is possible with optional pulling adapters
- Spreading distance of 285 mm with only 13,3 kg weight
- Sold by default without battery and tips, for free kit composition!




Technical data

Dimensions (with battery, without jaws)	761 x 192 x 241 mm
Weight (with battery, without tips)	13,3 kg
Max. cutting force	324 kN
Max. spreading force (F1)	1305 kN
Spreading force with standard tips (F2)	30,0 - 36,1 kN
Spreading force with door opening tips (F8)	28,8 - 35,3 kN
Pulling force with adaptors (F3)	35,3 - 47,2 kN
EN class (without tips)	AC 140 H - 13,3
EN class (with standard tips)	BK 30/285 - H - 14,9
EN cutting performance	1H-2H-3H-4H-5H
NFPA class	A6/B7/C6/D7/E7
ID number	1082900


Standard tip (ID. 3867323)

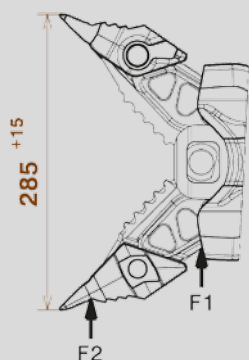


Door opening tips (ID. 1089005)



Special tip (ID. 1051896)

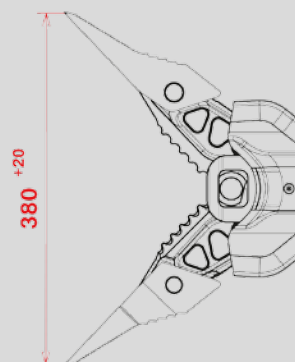

Pulling adaptor (ID. 2836033)

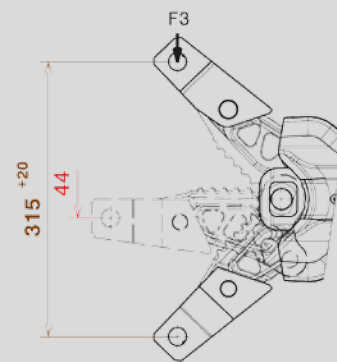

WEBER-HYDRAULIK GMBH

Heilbronner Straße 30
74363 Güglingen/Deutschland
Telefon +49 (0) 7135/71-10270
Telefax +49 (0) 7135/71-10396
info@weber-rescue.com

Industriegebiet 3 + 4
4460 Losenstein/Österreich
Telefon +43 (0) 7255/6237-120
Telefax +43 (0) 7255/6237-12461
info@weber-rescue.com

WEBERRESCUE
SYSTEMS

www.weber-rescue.com